



LED spotlight C1-mini-UHC

part number: A400014

description:

LED spotlight for installation on magnetic track,
180° rotatable, 90° swivelling

housing colour:

aluminum anodised matte in black, silver, gold, champagne
(other surface finishing on request)

optics:

8°, 15°, 18°, 26°, 30°, 45°, 80°, 47°+25°, 40°+10°

light colour (+/- 100K):

~2,700 K, ~3,000 K, ~3,500 K, ~4,000 K, ~5,700 K

high power LED, high CRI DIN EN 55015:2019,
lifetime 50,000 hours | basis of lifetime L80B10

protection class:

IP 20, protection class III, CE

luminous flux (~3,000 K | 30°):

~140 lm at ~2.3 W (61 lm/W)


power input: 12V DC (constant voltage)**allowed power supplies:**

power supplies of LPF, NPF or APV series by MeanWell
with constant voltage 12V DC, class 2
in combination with dimmer by feno
(other power supplies on request)

dimming: external**accessory:** magnetic track**optional accessories:**

magnetic track holders,
honeycomb grid, anti-glare tube, slash cut tube,
snoot (8°), light diffusion foil, barn doors,
zoom optic (9° - 33°)



dimensions

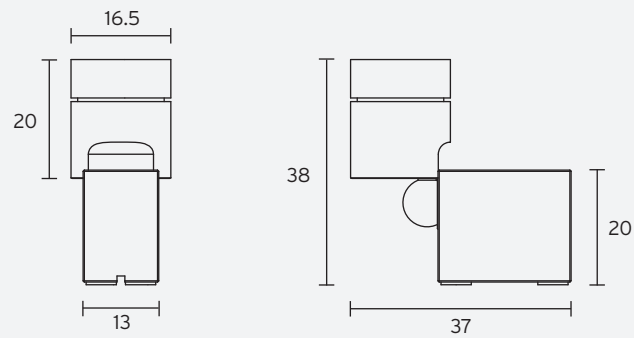

specification in mm

photometry

light colour ~3,000 K | standard lens 30° | CRI typ. 97, R9 > 90, R12 > 90 | colour variation ≤ 3 SDCM | distance ~60 cm

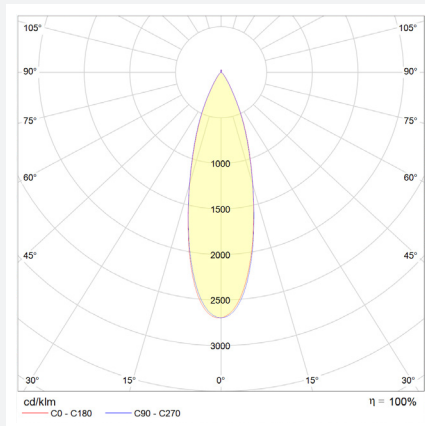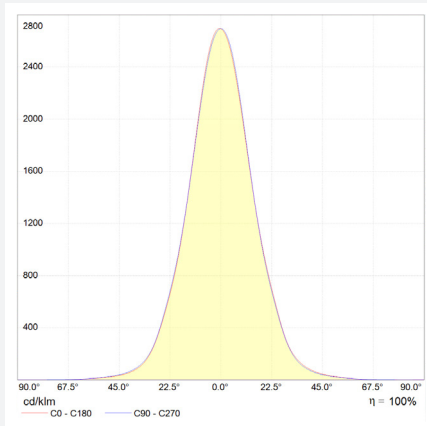

technical changes reserved | March 2025